

BLEACH

BATH

Ralf Wichmann

Thomas Hübsch

-and-

Thomas Stetzer

PATENT APPLICATION

LE-00/032 (7244*111)

"Express Mail" mailing label
number EK219526071
Date of Deposit
-AUGUST 01, 2001-
I hereby certify that this paper or fee is
being deposited with the United States Postal
Service "Express Mail Post Office to
Addressee" service under 37CFR 1.10 on the
date indicated above and is addressed to Box
PATENT APPLN., Comm. of Patents,
Washington, D.C. 20231
-Carrie A. McPherson-
(Typed or printed name of person mailing
paper or fee)
(Signature of person mailing paper or fee)

Bleach bath

5 This invention relates to a bleach or bleach/fixing solution for processing photographic silver halide materials which, relative to the silver halide content of the unprocessed material, exhibit prior to the bleaching step a content of silver arising from development of at least 65 mol%, in particular to a bleach or bleach/fixing solution for processing colour reversal materials and to a process for the processing colour reversal materials using such a solution.

10 It is known to use iron(III) complexes of aminopolycarboxylic acids for bleaching photographic materials, i.e. for oxidising the metallic silver formed during development, for which purpose numerous complexing agents have been proposed (c.f. for example Research Discl., Vol. 240, Item 24023, DE 2 321 400, DE 3 743 783, DE 3 800 270, US 3 241 966, US 3 615 508, US 5 238 791, US 5 885 757). In
15 practice, colour reversal materials are usually processed using the iron(III) complex with ethylenediaminetetraacetic acid (EDTA) at a concentration of at least 0.30 mol/l as the complexing agent for bleach baths. While other substances, such as for example propylenediaminetetraacetic acid (PDTA), β -alaninediacetic acid (ADA), methyliminodiacetic acid (MIDA), diethylenetriaminepentaacetic acid (DTPA),
20 iminosuccinic acid propionate (ISP), racemic and (S,S)-ethylenediaminedisuccinic acid (EDDS), are indeed stated as suitable iron(III) complexing agents for bleaching photographic materials and have successfully been used for processing colour negative materials, suitability for the specific requirements of colour reversal processing has not been described.

25 The content of complexing agents is excessively high in known bleach baths for colour reversal materials. Apart from entailing material costs, this content is in particular associated with an unwanted environmental impact as the complexing agents used are sparingly biodegradable. The elevated concentration is used in order
30 to meet the very stringent requirements which reversal materials place on a bleaching bath. In reversal processing, the majority of the silver halide is in fact reduced to

silver, namely in the first development initially the proportion of crystals exposed with the image, which generally amounts to less than 30 mol%, and then the unexposed crystals on secondary development after the reversal bath, such that, relative to the total silver content of the material, at least 65 mol% of Ag^0 , frequently at least 80 mol% and often even at least 90 mol% of Ag^0 must be bleached, whereas in negative materials this proportion of Ag^0 originates only from the exposed crystals and is accordingly conventionally distinctly below 30 mol%. This difference with colour reversal films is manifested particularly seriously in materials having a total silver content, stated as silver nitrate, of at least 6.0 g/m^2 , in particular of at least 7.5 g/m^2 . Unless indicated to the contrary, all absolute quantities of silver are stated hereinafter as g of silver nitrate; 1 mol of silver is accordingly stated as 170 g of silver, irrespective of whether it is metallic or chemically bound silver.

When processing colour reversal films, at least 3.9 g of silver, frequently at least 5.6 g of silver and often even at least 6.3 g of silver must be bleached per m^2 .

Another problem of known bleach baths is the stability of the bath with regard to chemical precipitation. US 4 933 266 accordingly discloses that when an iron/PDPA bleaching bath is used, it is necessary to use another complexing agent, such as for example diaminopropanoltetraacetic acid (DPTA) in order to counteract precipitation, for example due to entrained phosphate. Such additional complexing agents constitute an additional chemical load in the bleach baths and are accordingly unwanted both on cost grounds and due to the associated environmental impact.

Moreover, it is not possible according to the prior art simultaneously to achieve in colour reversal processing both a very good bleaching action, discernible from a very low residual silver content, and a very low bleaching fog value, discernible from a low value of yellow minimum density. Both requirements are particularly critical in reversal materials since, on the one hand, as described above, an elevated proportion of reduced silver must be bleached and, on the other, both the residual silver, which is usually coloured, and the bleaching fog give rise to colour casts and an elevated

minimum density, which have a severely disruptive effect for example when projecting reversal films and, unlike with negative films, cannot be corrected by the enlargement process in the printer.

5 Known bleach baths for reversal materials exhibit further environmental and economic disadvantages as they cannot sensibly be reprocessed. Due to the required elevated active substance content, such a large volume of fresh concentrate would have to be added to the used solution that the resultant increase in volume would make recycling uneconomic. The increase in volume also results in increased
10 quantities of waste.

15 The object underlying the invention is accordingly to provide a bleach or bleach/-fixing bath which is particularly suitable for processing photographic silver halide materials having an elevated proportion of silver to be bleached and in particular is suitable for processing colour reversal materials, and to provide a process for processing colour reversal materials, wherein the least possible quantity of complexing agent should be used, a low residual silver content and simultaneously a low bleaching fog value of the processed materials should be achieved and the bleach or bleach/fixing bath should also be resistant to precipitation without stabilising
20 additives.

It has now surprisingly been found that this may be achieved if the iron/PDТА or iron/ADA complex is used in the ready-to-use bleach or bleach/fixing bath in a concentration range of from 0.045 to 0.25 mol/l. Particularly surprisingly it is
25 consequently possible to manage with only little bleaching agent, despite the elevated proportion of silver to be bleached.

The present invention accordingly provides a bleach or bleach/fixing solution for processing photographic silver halide materials which, relative to the silver halide
30 content of the unprocessed material, exhibit prior to the bleaching step a content of silver arising from development (bleaching proportion) of at least 65 mol%,

characterised in that the solution contains at least one iron complex of propylene-diaminetetraacetic acid or of β -alaninediacetic acid or a mixture of these complexes and the total concentration of the stated iron complexes in the solution is at least 0.045 and at most 0.25 mol/l.

5

The iron complex of PDTA is conventionally used as a sodium, potassium or ammonium salt, but any other cations may also be used.

In a preferred embodiment, the bleach bath used contains no ammonium ions.

10

The bleaching proportion may readily be determined by, contrary to conventional practice, only fixing the developed material and then determining the silver content, for example by using the X-ray fluorescence method. This value is then related to the corresponding result for the unprocessed material.

15

The present invention also provides a bleach or bleach/fixing solution for processing colour reversal silver halide materials, characterised in that the solution contains at least one iron complex of propylenediaminetetraacetic acid or of β -alaninediacetic acid or a mixture of these complexes and the total concentration of the stated iron complexes in the solution is at least 0.045 and at most 0.25 mol/l.

20

The bleach baths according to the invention are advantageously used for materials having a bleaching proportion of at least 80 mol%, in particular of at least 90 mol%.

25

The bleach baths according to the invention are preferably used for materials with negative-working emulsions. These may, in rare cases, comprise special negative materials in which an unusually large proportion of the silver halide crystals is exposed and thus reduced to silver even at the first development stage. Usually, however, the materials are reversal materials and in particular colour reversal materials which, after the first development, pass through a reversal step and a second development (reversal development). Particularly advantageous bleaching fog

30

value values are achieved in colour reversal materials with chromogenic reversal development.

5 The bleach baths according to the invention are advantageously used for materials having a total quantity of silver of at least 6 g/m^2 , in particular of at least 7.5 g/m^2 , wherein the materials particularly advantageously comprise film materials with a transparent support.

10 The bleach baths according to the invention are preferably used for materials in which at least 3.9 g of silver, in particular at least 5.6 g of silver and particularly preferably at least 6.3 g of silver must be bleached during the processing thereof.

15 The concentration range according to the invention of PDTA or ADA iron complexes of 0.045 to 0.25 mol/l relates to the ready-to-use solution or the tank solution which is in use. In contrast, for storage and distribution purposes, it is usually more advantageous to supply the necessary chemicals in a preparation usually having a lower or even zero water content, wherein the chemicals may comprise one or more components from which the ready-to-use solutions are only subsequently prepared, usually directly by the end-user, conventionally by addition of water. Such preparations
20 preferably having a lower water content are not only suitable for preparing fresh bleach solutions, but are also suitable to be added for the purpose of regenerating used baths in the processing facility and for refreshing the overflow in order to permit reuse thereof.

25 For the purposes of the invention, components should be taken to mean any separately supplied containers such as solutions, liquids or solids or formulations thereof, such as tablets or capsules.

30 Reuse of the overflow after refreshing or rejuvenation is particularly preferred because much less of the solution, which is difficult to dispose of, is formed as a consequence. It has been found that the bleach baths according to the invention are

very well suited to rejuvenation and that, even under these conditions which may result in a build up of disruptive substances, such as phosphate for example, entrained with the material or rinsing water, no precipitation occurs. The bleach solutions according to the invention may particularly effectively be rejuvenated if the content thereof in the tank solution is between 0.045 and 0.20 mol/l.

One-part concentrates are in particular preferred as preparations having a lower water content.

Although, according to the invention, the bleaching baths may comprise both bleach baths and combined bleach/fixing baths, it is preferred to use bleach baths which have substantially no fixing action, in particular if a very low bleaching fog value is to be achieved. The bleach baths advantageously contain thiosulfate at most in a quantity which is insufficient to fix the undeveloped silver halide; the baths particularly advantageously contain substantially no thiosulfate.

Whenever the bleach solutions according to the invention are used, lower susceptibility to disruptive precipitation and a lower bleaching fog are always achieved, but PDTA and ADA behave somewhat differently. If particularly elevated resistance to precipitation is to be achieved, it is preferred to use an elevated proportion of or substantially only PDTA as the complexing agent. If, instead, the aim is to achieve the lowest possible bleaching fog value, it is preferred to use an elevated proportion of or substantially only ADA as the complexing agent. "Elevated proportion" is intended to mean at least 60, in particular at least 80 and particularly advantageously at least 90 mol%, relative to the complexing agents.

Apart from Fe/PDTA and/or Fe/ADA, the bleach solutions according to the invention may also contain further iron complexes, including those with other aminopolycarboxylic acids as ligands, for example Fe/EDTA or Fe/DTPA. In this case, the total concentration of iron complexes should, however, be no more than 0.25 mol/l.

The bleach solutions particularly preferably contain substantially no iron/-aminopolycarboxylic acid component other than Fe/PDTA or Fe/ADA.

5 The bleach baths according to the invention may be used for any known processing processes, provided that these processes are suitable for colour reversal materials or materials in which at least 65 mol% of the total silver must be bleached.

10 The basic processing steps for reversal materials and the constituents used are described inter alia in Res. Discl. 37038 (1995), pages 109-114 and Res. Discl. 37254 (1995), pages 294 et seq.. More detailed examples of reversal materials and reversal development, for which the bleach baths according to the invention are suitable may be found inter alia in DE 19 742 040 and US 6 048 673, US 6 013 422, US 4 921 779, US 4 975 356, US 5 037 725, US 5 523 195, US 5 552 264, US 5 736 302, Agfa AP 44 and AP 63 process manuals, and in "Process E-6 Using KODAK Chemicals, Process E-6 Publication Z-119" and "Process R-3 Using KODAK EKTACHROME R-3 Chemicals Publication Z-129", both published by Eastman Kodak.

15 20 A preferred process for processing colour reversal silver halide materials is one containing a bleaching step, characterised in that the bleaching step is performed using a solution which contains at least one iron complex of propylenediamine-tetraacetic acid or of β -alaninediacetic acid or a mixture of these complexes and the total concentration of the stated iron complexes in the solution is at least 0.045 and at most 0.25 mol/l.

25

The process is particularly suitable for materials with a transparent support which preferably comprise at least 6.0 g of silver per m².

30 In one advantageous embodiment, prior to the bleaching step, the process comprises at least the steps first development, reversal step and colour development, wherein

the reversal step may comprise chemical fogging (reversal bath) or exposure to light and colour development preferably proceeds chromogenically.

5 The bleaching step may include fixing, but it is preferred if the process comprises a separate fixing step after the bleaching step.

In one particularly preferred embodiment, the process according to the invention comprises the following process steps in the stated order:

10 first developer - water rinsing - reversal bath - colour developer - conditioning bath - bleach bath - (water rinsing) - fixing bath - water rinsing - finishing bath - drying.

11
12
13
14
15
16
17
18
19
20
21
22
23
24
25
26
27
28
29
30
31
32
33
34
35
36
37
38
39
40
41
42
43
44
45
46
47
48
49
50
51
52
53
54
55
56
57
58
59
60
61
62
63
64
65
66
67
68
69
70
71
72
73
74
75
76
77
78
79
80
81
82
83
84
85
86
87
88
89
90
91
92
93
94
95
96
97
98
99
100
101
102
103
104
105
106
107
108
109
110
111
112
113
114
115
116
117
118
119
120
121
122
123
124
125
126
127
128
129
130
131
132
133
134
135
136
137
138
139
140
141
142
143
144
145
146
147
148
149
150
151
152
153
154
155
156
157
158
159
160
161
162
163
164
165
166
167
168
169
170
171
172
173
174
175
176
177
178
179
180
181
182
183
184
185
186
187
188
189
190
191
192
193
194
195
196
197
198
199
200
201
202
203
204
205
206
207
208
209
210
211
212
213
214
215
216
217
218
219
220
221
222
223
224
225
226
227
228
229
230
231
232
233
234
235
236
237
238
239
240
241
242
243
244
245
246
247
248
249
250
251
252
253
254
255
256
257
258
259
260
261
262
263
264
265
266
267
268
269
270
271
272
273
274
275
276
277
278
279
280
281
282
283
284
285
286
287
288
289
290
291
292
293
294
295
296
297
298
299
300
301
302
303
304
305
306
307
308
309
310
311
312
313
314
315
316
317
318
319
320
321
322
323
324
325
326
327
328
329
330
331
332
333
334
335
336
337
338
339
340
341
342
343
344
345
346
347
348
349
350
351
352
353
354
355
356
357
358
359
360
361
362
363
364
365
366
367
368
369
370
371
372
373
374
375
376
377
378
379
380
381
382
383
384
385
386
387
388
389
390
391
392
393
394
395
396
397
398
399
400
401
402
403
404
405
406
407
408
409
410
411
412
413
414
415
416
417
418
419
420
421
422
423
424
425
426
427
428
429
430
431
432
433
434
435
436
437
438
439
440
441
442
443
444
445
446
447
448
449
450
451
452
453
454
455
456
457
458
459
460
461
462
463
464
465
466
467
468
469
470
471
472
473
474
475
476
477
478
479
480
481
482
483
484
485
486
487
488
489
490
491
492
493
494
495
496
497
498
499
500
501
502
503
504
505
506
507
508
509
510
511
512
513
514
515
516
517
518
519
520
521
522
523
524
525
526
527
528
529
530
531
532
533
534
535
536
537
538
539
540
541
542
543
544
545
546
547
548
549
550
551
552
553
554
555
556
557
558
559
560
561
562
563
564
565
566
567
568
569
570
571
572
573
574
575
576
577
578
579
580
581
582
583
584
585
586
587
588
589
590
591
592
593
594
595
596
597
598
599
600
601
602
603
604
605
606
607
608
609
610
611
612
613
614
615
616
617
618
619
620
621
622
623
624
625
626
627
628
629
630
631
632
633
634
635
636
637
638
639
640
641
642
643
644
645
646
647
648
649
650
651
652
653
654
655
656
657
658
659
660
661
662
663
664
665
666
667
668
669
670
671
672
673
674
675
676
677
678
679
680
681
682
683
684
685
686
687
688
689
690
691
692
693
694
695
696
697
698
699
700
701
702
703
704
705
706
707
708
709
710
711
712
713
714
715
716
717
718
719
720
721
722
723
724
725
726
727
728
729
730
731
732
733
734
735
736
737
738
739
740
741
742
743
744
745
746
747
748
749
750
751
752
753
754
755
756
757
758
759
760
761
762
763
764
765
766
767
768
769
770
771
772
773
774
775
776
777
778
779
780
781
782
783
784
785
786
787
788
789
790
791
792
793
794
795
796
797
798
799
800
801
802
803
804
805
806
807
808
809
810
811
812
813
814
815
816
817
818
819
820
821
822
823
824
825
826
827
828
829
830
831
832
833
834
835
836
837
838
839
840
841
842
843
844
845
846
847
848
849
850
851
852
853
854
855
856
857
858
859
860
861
862
863
864
865
866
867
868
869
870
871
872
873
874
875
876
877
878
879
880
881
882
883
884
885
886
887
888
889
890
891
892
893
894
895
896
897
898
899
900
901
902
903
904
905
906
907
908
909
910
911
912
913
914
915
916
917
918
919
920
921
922
923
924
925
926
927
928
929
930
931
932
933
934
935
936
937
938
939
940
941
942
943
944
945
946
947
948
949
950
951
952
953
954
955
956
957
958
959
960
961
962
963
964
965
966
967
968
969
970
971
972
973
974
975
976
977
978
979
980
981
982
983
984
985
986
987
988
989
990
991
992
993
994
995
996
997
998
999
1000
1001
1002
1003
1004
1005
1006
1007
1008
1009
1010
1011
1012
1013
1014
1015
1016
1017
1018
1019
1020
1021
1022
1023
1024
1025
1026
1027
1028
1029
1030
1031
1032
1033
1034
1035
1036
1037
1038
1039
1040
1041
1042
1043
1044
1045
1046
1047
1048
1049
1050
1051
1052
1053
1054
1055
1056
1057
1058
1059
1060
1061
1062
1063
1064
1065
1066
1067
1068
1069
1070
1071
1072
1073
1074
1075
1076
1077
1078
1079
1080
1081
1082
1083
1084
1085
1086
1087
1088
1089
1090
1091
1092
1093
1094
1095
1096
1097
1098
1099
1100
1101
1102
1103
1104
1105
1106
1107
1108
1109
1110
1111
1112
1113
1114
1115
1116
1117
1118
1119
1120
1121
1122
1123
1124
1125
1126
1127
1128
1129
1130
1131
1132
1133
1134
1135
1136
1137
1138
1139
1140
1141
1142
1143
1144
1145
1146
1147
1148
1149
1150
1151
1152
1153
1154
1155
1156
1157
1158
1159
1160
1161
1162
1163
1164
1165
1166
1167
1168
1169
1170
1171
1172
1173
1174
1175
1176
1177
1178
1179
1180
1181
1182
1183
1184
1185
1186
1187
1188
1189
1190
1191
1192
1193
1194
1195
1196
1197
1198
1199
1200
1201
1202
1203
1204
1205
1206
1207
1208
1209
1210
1211
1212
1213
1214
1215
1216
1217
1218
1219
1220
1221
1222
1223
1224
1225
1226
1227
1228
1229
1230
1231
1232
1233
1234
1235
1236
1237
1238
1239
1240
1241
1242
1243
1244
1245
1246
1247
1248
1249
1250
1251
1252
1253
1254
1255
1256
1257
1258
1259
1260
1261
1262
1263
1264
1265
1266
1267
1268
1269
1270
1271
1272
1273
1274
1275
1276
1277
1278
1279
1280
1281
1282
1283
1284
1285
1286
1287
1288
1289
1290
1291
1292
1293
1294
1295
1296
1297
1298
1299
1300
1301
1302
1303
1304
1305
1306
1307
1308
1309
1310
1311
1312
1313
1314
1315
1316
1317
1318
1319
1320
1321
1322
1323
1324
1325
1326
1327
1328
1329
1330
1331
1332
1333
1334
1335
1336
1337
1338
1339
1340
1341
1342
1343
1344
1345
1346
1347
1348
1349
1350
1351
1352
1353
1354
1355
1356
1357
1358
1359
1360
1361
1362
1363
1364
1365
1366
1367
1368
1369
1370
1371
1372
1373
1374
1375
1376
1377
1378
1379
1380
1381
1382
1383
1384
1385
1386
1387
1388
1389
1390
1391
1392
1393
1394
1395
1396
1397
1398
1399
1400
1401
1402
1403
1404
1405
1406
1407
1408
1409
1410
1411
1412
1413
1414
1415
1416
1417
1418
1419
1420
1421
1422
1423
1424
1425
1426
1427
1428
1429
1430
1431
1432
1433
1434
1435
1436
1437
1438
1439
1440
1441
1442
1443
1444
1445
1446
1447
1448
1449
1450
1451
1452
1453
1454
1455
1456
1457
1458
1459
1460
1461
1462
1463
1464
1465
1466
1467
1468
1469
1470
1471
1472
1473
1474
1475
1476
1477
1478
1479
1480
1481
1482
1483
1484
1485
1486
1487
1488
1489
1490
1491
1492
1493
1494
1495
1496
1497
1498
1499
1500
1501
1502
1503
1504
1505
1506
1507
1508
1509
1510
1511
1512
1513
1514
1515
1516
1517
1518
1519
1520
1521
1522
1523
1524
1525
1526
1527
1528
1529
1530
1531
1532
1533
1534
1535
1536
1537
1538
1539
1540
1541
1542
1543
1544
1545
1546
1547
1548
1549
1550
1551
1552
1553
1554
1555
1556
1557
1558
1559
1560
1561
1562
1563
1564
1565
1566
1567
1568
1569
1570
1571
1572
1573
1574
1575
1576
1577
1578
1579
1580
1581
1582
1583
1584
1585
1586
1587
1588
1589
1590
1591
1592
1593
1594
1595
1596
1597
1598
1599
1600
1601
1602
1603
1604
1605
1606
1607
1608
1609
1610
1611
1612
1613
1614
1615
1616
1617
1618
1619
1620
1621
1622
1623
1624
1625
1626
1627
1628
1629
1630
1631
1632
1633
1634
1635
1636
1637
1638
1639
1640
1641
1642
1643
1644
1645
1646
1647
1648
1649
1650
1651
1652
1653
1654
1655
1656
1657
1658
1659
1660
1661
1662
1663
1664
1665
1666
1667
1668
1669
1670
1671
1672
1673
1674
1675
1676
1677
1678
1679
1680
1681
1682
1683
1684
1685
1686
1687
1688
1689
1690
1691
1692
1693
1694
1695
1696
1697
1698
1699
1700
1701
1702
1703
1704
1705
1706
1707
1708
1709
1710
1711
1712
1713
1714
1715
1716
1717
1718
1719
1720
1721
1722
1723
1724
1725
1726
1727
1728
1729
1730
1731
1732
1733
1734
1735
1736
1737
1738
1739
1740
1741
1742
1743
1744
1745
1746
1747
1748
1749
1750
1751
1752
1753
1754
1755
1756
1757
1758
1759
1760
1761
1762
1763
1764
1765
1766
1767
1768
1769
1770
1771
1772
1773
1774
1775
1776
1777
1778
1779
1780
1781
1782
1783
1784
1785
1786
1787
1788
1789
1790
1791
1792
1793
1794
1795
1796
1797
1798
1799
1800
1801
1802
1803
1804
1805
1806
1807
1808
1809
1810
1811
1812
1813
1814
1815
1816
1817
1818
1819
1820
1821
1822
1823
1824
1825
1826
1827
1828
1829
1830
1831
1832
1833
1834
1835
1836
1837
1838
1839
1840
1841
1842
1843
1844
1845
1846
1847
1848
1849
1850
1851
1852
1853
1854
1855
1856
1857
1858
1859
1860
1861
1862
1863
1864
1865
1866
1867
1868
1869
1870
1871
1872
1873
1874
1875
1876
1877
1878
1879
1880
1881
1882
1883
1884
1885
1886
1887
1888
1889
1890
1891
1892
1893
1894
1895
1896
1897
1898
1899
1900
1901
1902
1903
1904
1905
1906
1907
1908
1909
1910
1911
1912
1913
1914
1915
1916
1917
1918
1919
1920
1921
1922
1923
1924
1925
1926
1927
1928
1929
1930
1931
1932
1933
1934
1935
1936
1937
1938
1939
1940
1941
1942
1943
1944
1945
1946
1947
1948
1949
1950
1951
1952
1953
1954
1955
1956
1957
1958
1959
1960
1961
1962
1963
1964
1965
1966
1967
1968
1969
1970
1971
1972
1973
1974
1975
1976
1977
1978
1979
1980
1981
1982
1983
1984
1985
1986
1987
1988
1989
1990
1991
1992
1993
1994
1995
1996
1997
1998
1999
2000
2001
2002
2003
2004
2005
2006
2007
2008
2009
2010
2011
2012
2013
2014
2015
2016
2017
2018
2019
2020
2021
2022
2023
2024
2025
2026
2027
2028
2029
2030
2031
2032
2033
2034
2035
2036
2037
2038
2039
2040
2041
2042
2043
2044
2045
2046
2047
2048
2049
2050
2051
2052
2053
2054
2055
2056
2057
2058
2059
2060
2061
2062
2063
2064
2065
2066
2067
2068
2069
2070
2071
2072
2073
2074
2075
2076
2077
2078
2079
2080
2081
2082
2083
2084
2085
2086
2087
2088
2089
2090
2091
2092
2093
2094
2095
2096
2097
2098
2099
2100
2101
2102
2103
2104
2105
2106
2107
2108
2109
2110
2111
2112
2113
2114
2115
2116
2117
2118
2119
2120
2121
2122
2123
2124
2125
2126
2127
2128
2129
2130
2131
2132
2133
2134
2135
2136
2137
2138
2139
2140
2141
2142
2143
2144
2145
2146
2147
2148
2149
2150
2151
2152
2153
2154
2155
2156
2157
2158
2159
2160
2161
2162
2163
2164
2165
2166
2167
2168
2169
2170
2171
2172
2173
2174
2175
2176
2177
2178
2179
2180
2181
2182
2183
2184
2185
2186
2187
2188
2189
2190
2191
2192
2193
2194
2195
2196
2197

It is preferred if the conditioning bath contains little thioglycerol, in particular if the concentration thereof is less than 1.0 vol.%. Surprisingly, very good bleaching action is achieved when the bleach solutions according to the invention are used, despite economising on thioglycerol. This even applies if thioglycerol is substantially
5 completely dispensed with.

The finishing bath may also contain substantially no formalin or formalin releasers or may contain formalin.

10 It is advantageous if the process equilibrium of the bleach bath is maintained by addition of a regenerator. In particular, it is preferred if this is achieved by direct apportionment of a concentrated solution.

15 It is particularly advantageous if the process equilibrium of the solution used for the bleaching step is maintained by apportioning a solution obtained from the bath overflow after rejuvenation.

20 Further preferred embodiments of the invention are disclosed in the subordinate claims.

25 Examples of colour photographic materials are colour negative films, colour reversal films, colour positive films, colour photographic paper, colour reversal photographic paper, colour-sensitive materials for the dye diffusion transfer process or the silver dye bleaching process. A review may be found in Research Disclosure 37038 (1995) and Research Disclosure 38957 (1996).

30 The photographic materials consist of a support, onto which at least one photo-sensitive silver halide emulsion layer is applied. Suitable supports are in particular thin films and sheets. A review of support materials and auxiliary layers applied to the front and reverse sides thereof is given in Research Disclosure 37254, part 1 (1995), page 285 and in Research Disclosure 38957, part XV (1996), page 627.

The colour photographic materials conventionally contain at least one red-sensitive, one green-sensitive and one blue-sensitive silver halide emulsion layer, optionally together with interlayers and protective layers.

5

Depending upon the type of photographic material, these layers may be differently arranged. This is demonstrated for the most important products:

10

Colour photographic films such as colour negative films and colour reversal films have on the support, in the stated sequence, 2 or 3 red-sensitive, cyan-coupling silver halide emulsion layers, 2 or 3 green-sensitive, magenta-coupling silver halide emulsion layers and 2 or 3 blue-sensitive, yellow-coupling silver halide emulsion layers. The layers of identical spectral sensitivity differ with regard to their photographic sensitivity, wherein the less sensitive sublayers are generally arranged closer to the support than the more highly sensitive sublayers.

15

A yellow filter layer is conventionally located between the green-sensitive and blue-sensitive layers which prevents blue light from penetrating into the underlying layers.

20

Possible options for different layer arrangements and the effects thereof on photographic properties are described in J. Inf. Rec. Mats., 1994, volume 22, pages 183-193 and in Research Disclosure 38957, part XI (1996), page 624.

25

Colour photographic paper, which is usually substantially less photosensitive than a colour photographic film, conventionally has on the support, in the stated sequence, one blue-sensitive, yellow-coupling silver halide emulsion layer, one green-sensitive, magenta-coupling silver halide emulsion layer and one red-sensitive, cyan-coupling silver halide emulsion layer; the yellow filter layer may be omitted.

30

The number and arrangement of the photosensitive layers may be varied in order to achieve specific results. For example, all high sensitivity layers may be grouped

together in one package of layers and all low sensitivity layers may be grouped together in another package of layers in a photographic film in order to increase sensitivity (DE 25 30 645).

- 5 The substantial constituents of the photographic emulsion layers are binder, silver halide grains and colour couplers.

Details of suitable binders may be found in Research Disclosure 37254, part 2 (1995), page 286 and in Research Disclosure 38957, part II.A (1996), page 598.

10

Details of suitable silver halide emulsions, the production, ripening, stabilisation and spectral sensitisation thereof, including suitable spectral sensitisers, may be found in Research Disclosure 37254, part 3 (1995), page 286, in Research Disclosure 37038, part XV (1995), page 89 and in Research Disclosure 38957, part V.A (1996), page 603.

15

Photographic materials with camera sensitivity conventionally contain silver bromide-iodide emulsions, which may optionally contain small proportions of silver chloride. Photographic print materials contain either silver chloride-bromide emulsions containing up to 80 mol% of AgBr or silver chloride-bromide emulsions containing above 95 mol% of AgCl.

20

Details of colour couplers may be found in Research Disclosure 37254, part 4 (1995), page 288, in Research Disclosure 37038, part II (1995), page 80 and in Research Disclosure 38957, part X.B (1996), page 616. The maximum absorption of the dyes formed from the couplers and the colour developer oxidation product is preferably within the following ranges: yellow coupler 430 to 460 nm, magenta coupler 540 to 560 nm, cyan coupler 630 to 700 nm.

25

In order to improve sensitivity, grain, sharpness and colour separation in colour photographic films, compounds are frequently used which, on reaction with the

30

developer oxidation product, release photographically active compounds, for example DIR couplers which eliminate a development inhibitor.

5 Details relating to such compounds, in particular couplers, may be found in Research Disclosure 37254, part 5 (1995), page 290, in Research Disclosure 37038, part XIV (1995), page 86 and in Research Disclosure 38957, part X.C (1996), page 618.

10 Colour couplers, which are usually hydrophobic, as well as other hydrophobic constituents of the layers, are conventionally dissolved or dispersed in high-boiling organic solvents. These solutions or dispersions are then emulsified into an aqueous binder solution (conventionally a gelatine solution) and, once the layers have dried, are present as fine droplets (0.05 to 0.8 μm in diameter) in the layers.

15 Suitable high-boiling organic solvents, methods for the introduction thereof into the layers of a photographic material and further methods for introducing chemical compounds into photographic layers may be found in Research Disclosure 37254, part 6 (1995), page 292.

20 The non-photosensitive interlayers generally arranged between layers of different spectral sensitivity may contain agents which prevent an undesirable diffusion of developer oxidation products from one photosensitive layer into another photosensitive layer with a different spectral sensitisation.

25 Suitable compounds (white couplers, scavengers or DOP scavengers) may be found in Research Disclosure 37254, part 7 (1995), page 292, in Research Disclosure 37038, part III (1995), page 84 and in Research Disclosure 38957, part X.D (1996), pages 621 et seq..

30 The photographic material may also contain UV light absorbing compounds, optical brighteners, spacers, filter dyes, formalin scavengers, light stabilisers, antioxidants, D_{min} dyes, plasticisers (latices), biocides and additives to improve coupler and dye

stability, to reduce colour fogging and to reduce yellowing, and others. Suitable compounds may be found in Research Disclosure 37254, part 8 (1995), page 292, in Research Disclosure 37038, parts IV, V, VI, VII, X, XI and XIII (1995), pages 84 et seq. and in Research Disclosure 38957, parts VI, VIII, IX and X (1996), pages 607 and 610 et seq..

The layers of colour photographic materials are conventionally hardened, i.e. the binder used, preferably gelatine, is crosslinked by appropriate chemical methods.

10 Suitable hardener substances may be found in Research Disclosure 37254, part 9 (1995), page 294, in Research Disclosure 37038, part XII (1995), page 86 and in Research Disclosure 38957, part II.B (1996), page 599.

15 Once exposed with an image, colour photographic materials are processed using different processes depending upon their nature. Details relating to processing methods and the necessary chemicals are disclosed in Research Disclosure 37254, part 10 (1995), page 294, in Research Disclosure 37038, parts XVI to XXIII (1995), pages 95 et seq. and in Research Disclosure 38957, parts XVIII, XIX and XX (1996), pages 630 et seq. together with example materials.

Examples

	Process sequence	Time	Temperature
5	- First developer	6 min	38°C
	- Water rinsing	2 min	38°C
	- Reversal bath	2 min	38°C
	- Colour developer	6 min	38°C
	- Conditioning bath without formalin or "pre-bleach" with formalin releaser	2 min	38°C
10	- Bleach bath	6 min	38°C
	- Water rinsing (may also be omitted)	2 min	38°C
	- Fixing bath	4 min	38°C
	- Water rinsing	4 min	38°C
	- Finishing bath with or without formalin	1 min	38°C
15	- Drying	max. 63°C	

Conventional commercial Agfa AP 44 chemicals were used; the "pre-bleach" with formalin releaser (as also described in US 5 552 264) was of the following composition:

20	Pre-bleach	
	Water	600 ml
	Sodium formaldehyde bisulfite addition compound	25.0 g
25	Thioglycerol	0.4 g
	Potassium sulfite	6.0 g
	Phosphoric acid	0.2 g
	EDTA	3.0 g

30 Make up to 1 litre, adjust pH to 6.15 with KOH.

The bleach baths used were of the following composition:

- | | | |
|----|---|-----------|
| | - Water | 600 ml |
| | - Potassium bromide | 85.0 g |
| 5 | - Hydrobromic acid | 33.0 ml |
| | - Iron(III) salt of a complexing agent | |
| | according to Tables 1 to 3 | |
| | - free excess acid of the particular complexing agent | |
| | according to Tables 1 to 3 | 0.015 mol |
| 10 | - Potassium nitrate | 25.0 g |
| | - make up to 1 litre with water | |
| | - pH value (adjust with ammonia or | 5.0 |
| | hydrobromic acid) | |

- 15 Reversal material M-1 was processed after being exposed with subjects typical of amateur photography. Substantially irrespective of the selected subject, after colour development and before the bleaching step, the material had a reduced silver content of greater than 90 mol%, corresponding to greater than 7.3 g of silver for bleaching.

20 Reversal material M-1

The layers listed below were applied in succession onto a layer support of cellulose triacetate provided with an adhesion promoting layer.

- 25 1st layer (anti-halo layer)

Black colloidal silver sol

Silver application rate as silver nitrate 0.40 g/m²

Gelatine 1.60 g/m²

UV absorber UV 0.24 g/m²

2nd layer (interlayer)

Gelatine	0.64 g/m ²
----------	-----------------------

3rd layer (first red-sensitive layer)

5

Red-sensitised silver halide emulsion

(avg. grain diameter 0.34 μ m, 96 mol% bromide,
4 mol% iodide)

Silver application rate as silver nitrate	0.95 g/m ²
---	-----------------------

Coupler C-1	0.24 g/m ²
-------------	-----------------------

Gelatine	0.80 g/m ²
----------	-----------------------

Tricresyl phosphate (TCP)	0.12 g/m ²
---------------------------	-----------------------

4th layer (second red-sensitive layer)

Red-sensitised silver halide emulsion

(avg. grain diameter 0.43 μ m, 97 mol% bromide,
3 mol% iodide)

Silver application rate as silver nitrate	2.00 g/m ²
---	-----------------------

Coupler C-1	1.29 g/m ²
-------------	-----------------------

Gelatine	2.64 g/m ²
----------	-----------------------

TCP	0.65 g/m ²
-----	-----------------------

10 5th layer (interlayer)

Gelatine	1.78 g/m ²
----------	-----------------------

Compound S	0.24 g/m ²
------------	-----------------------

TCP	0.12 g/m ²
-----	-----------------------

6th layer (first green-sensitive layer)

Green-sensitised silver halide emulsion

(avg. grain diameter 0.34 μm , 96 mol% bromide,
4 mol% iodide)

Silver application rate as silver nitrate	1.05 g/m ²
Coupler C-3	0.22 g/m ²
Gelatine	1.00 g/m ²
TCP	0.22 g/m ²

7th layer (second green-sensitive layer)

Green-sensitised silver halide emulsion

(avg. grain diameter 0.42 μm , 98.5 mol% bromide,
1.5 mol% iodide)

Silver application rate as silver nitrate	1.65 g/m ²
Coupler C-3	1.00 g/m ²
Gelatine	2.65 g/m ²
TCP	1.00 g/m ²

8th layer (interlayer)

Gelatine	0.70 g/m ²
Compound S	0.10 g/m ²
TCP	0.05 g/m ²

10 9th layer (yellow filter layer)

Yellow colloidal silver sol

Silver application rate as silver nitrate	0.19 g/m ²
Gelatine	0.75 g/m ²

10th layer (interlayer)

Gelatine	0.50 g/m ²
----------	-----------------------

5 11th layer (first blue-sensitive layer)

Blue-sensitised silver halide emulsion

(avg. grain diameter 0.52 μ m, 95 mol% bromide,

5 mol% iodide)

Silver application rate as silver nitrate	0.60 g/m ²
---	-----------------------

Coupler C-2	0.60 g/m ²
-------------	-----------------------

Gelatine	0.90 g/m ²
----------	-----------------------

TCP	0.30 g/m ²
-----	-----------------------

12th layer (second blue-sensitive layer)

Blue-sensitised silver halide emulsion

(avg. grain diameter 0.70 μ m, 95 mol% bromide,

5 mol% iodide)

Silver application rate as silver nitrate	0.90 g/m ²
---	-----------------------

Coupler C-2	0.90 g/m ²
-------------	-----------------------

Gelatine	1.00 g/m ²
----------	-----------------------

TCP	0.45 g/m ²
-----	-----------------------

10

13th layer (interlayer)

Compound S	0.50 g/m ²
------------	-----------------------

Gelatine	2.56 g/m ²
----------	-----------------------

TCP	0.02 g/m ²
-----	-----------------------

UV absorber UV	0.55 g/m ²
----------------	-----------------------

14th layer (interlayer)

Lippmann silver halide emulsion

(avg. grain diameter 0.15 μm , 96 mol% bromide,
4 mol% iodide)

Silver application rate as silver nitrate

0.33 g/m^2

Gelatine

0.60 g/m^2

15th layer (protective layer)


Hardener H

1.20 g/m^2


Gelatine

0.80 g/m^2


The components used are of the following formulae:

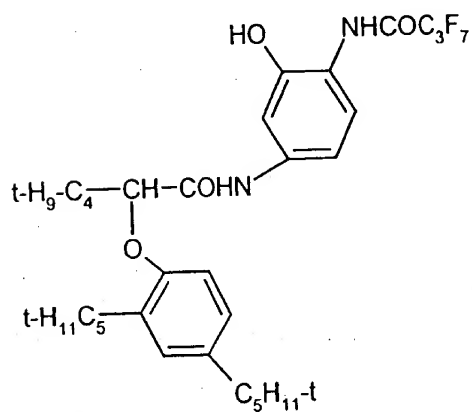


C-1

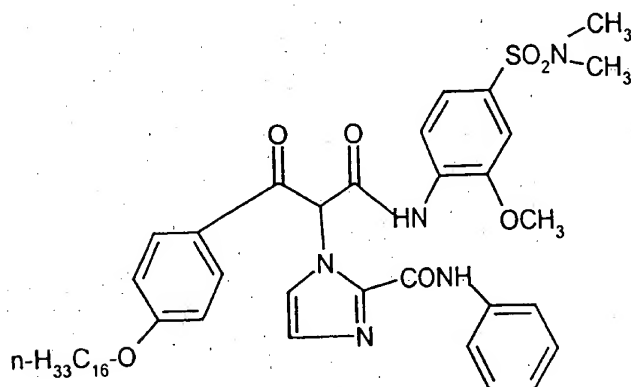



C-2

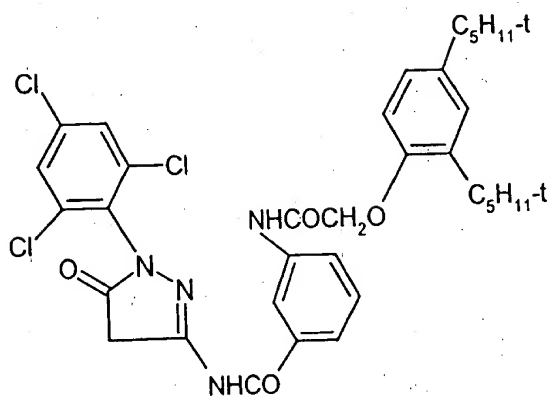


C-3



H



S

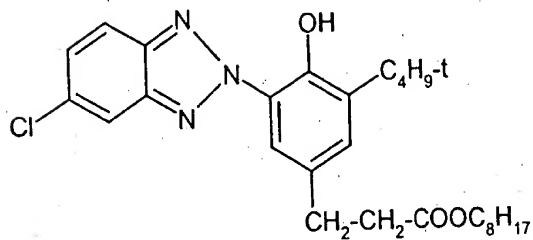

UV

Example 1

Exposed reversal material M-1 was processed in accordance with the above-stated process sequence, wherein the bleaching complexes and concentrations stated in Table 1 were used in the bleach bath. The residual silver remaining in the material was determined by X-ray fluorescence by post-development of resultant bleaching fog, measuring ΔD_{min} yellow and calculating the difference from true-to-type processing (1st Example in Table 1).

10 **Table 1**

Complexing agent	Iron complex concentration [mol/l]	Bleaching time [min]	Residual silver [g/m ²]	ΔD_{min} yellow	
EDTA	0.34	6	0.034	0.00	Comparison
EDTA	0.20	6	1.153	0.01	Comparison
EDTA	0.20	12	0.057	0.01	Comparison
MIDA	0.34	6	0.192	0.46	Comparison
MIDA	0.20	6	0.973	0.25	Comparison
PDTA	0.34	6	0.026	0.58	Comparison
PDTA	0.28	6	0.029	0.49	Comparison
PDTA	0.20	6	0.029	0.01	Invention
PDTA	0.09	6	0.031	0.01	Invention
PDTA	0.09	8	0.029	0.01	Invention
PDTA	0.045	6	0.032	0.01	Invention
PDTA	0.035	6	0.199	0.01	Comparison
PDTA	0.035	12	0.141	0.01	Comparison
ADA	0.34	6	0.028	0.51	Comparison
ADA	0.25	6	0.027	0.45	Comparison
ADA/PDTA	0.20/0.02	6	0.027	0.01	Invention
ADA	0.09	6	0.032	0.01	Invention

Complexing agent	Iron complex concentration [mol/l]	Bleaching time [min]	Residual silver [g/m ²]	Δ Dmin yellow	
ADA/PDТА	0.05/0.05	8	0.028	0.01	Invention
ADA	0.065	6	0.035	0.01	Invention
ADA	0.045	6	0.069	0.01	Invention
ADA	0.045	12	0.055	0.01	Invention
EDDS	0.34	6	0.282	0.48	Comparison
EDDS	0.25	6	0.881	0.39	Comparison
EDDS	0.20	6	1.128	0.01	Comparison
EDDS/PDТА	0.20/0.20	8	0.182	0.49	Comparison

As is evident from Table 1, the iron/EDTA complex does not achieve complete bleaching of the film material at low concentrations, even with distinctly extended bleaching times.

5

The iron/MIDA complex likewise does not achieve complete bleaching and moreover produces distinct bleaching fog. While the iron/PDТА and also the iron/ADA complex do indeed achieve complete bleaching at elevated concentrations, they also produce unacceptable bleaching fog. Surprisingly, no bleaching fog occurs at reduced concentration, while complete bleaching of the material is nevertheless achieved. At excessively low concentrations of the iron/PDТА and also of the iron/ADA complex, complete bleaching is not achieved even when bleaching times are extended. The concentration according to the invention of the iron/PDТА or iron/ADA complex or the mixture thereof in the tank solution is accordingly 0.045 to 0.25 mol/l.

15

An EDDS-based bleach bath does not exhibit adequate bleaching action even with extended bleaching times and elevated concentrations of the iron salt.

20

No differences were found between processing with a conditioning bath without a formalin releaser on the one hand and with a "pre-bleach" on the other.

Example 2

The conditioning bath used was of the following composition:

- 5 - Water 800 ml
- Ethylenediaminetetraacetic acid 8.0 g
- Sodium sulfite 12.0 g
- Thioglycerol in accordance with Table 2
- make up to 1 litre with water
- 10 - pH value (adjust with KOH or 6.15
- sulfuric acid)

The intention was to attempt to establish the lowest possible iron complex concentration by varying the content of thioglycerol, which acts as a bleaching
15 accelerant. The results are shown in Table 2.

The bleaching time was 6 minutes in all the Examples.

Table 2

Complexing agent	Iron complex concentration (mol/l)	Thioglycerol content per l of conditioning bath	Residual silver (g/m ²)	
EDTA	0.34	0.4 ml	0.034	Comparison
EDTA	0.20	0.4 ml	1.153	Comparison
EDTA	0.20	10 ml	1.036	Comparison
PDTA	0.34	0.4 ml	0.026	Comparison
PDTA	0.34	20 ml	0.295	Comparison
ADA/PDTA	0.05/0.20	4 ml	0.029	Invention
PDTA	0.28	20 ml	0.327	Comparison
PDTA	0.20	0.8 ml	0.026	Invention
PDTA	0.20	4.0 ml	0.030	Invention
PDTA	0.09	0.8 ml	0.031	Invention

Complexing agent	Iron complex concentration (mol/l)	Thioglycerol content per l of conditioning bath	Residual silver (g/m ²)	
ADA/PDTA	0.06/0.03	20 ml	0.032	Invention
PDTA	0.035	0.5 ml	0.209	Comparison
PDTA	0.035	4 ml	0.199	Comparison
PDTA	0.035	20 ml	0.178	Comparison

As is evident from Table 2, bleaching action is surprisingly distinctly poorer at elevated Fe/PDTA concentrations and elevated thioglycerol concentrations than at low thioglycerol concentrations. Even high concentrations of thioglycerol cannot bring about a satisfactory improvement in bleaching action when Fe/PDTA concentrations are excessively low.

Further tests demonstrated that, within the concentration range according to the invention of 0.045 to 0.25 mol/l, when Fe/PDTA and/or Fe/ADA are used, it is also possible completely to dispense with thioglycerol and nevertheless achieve good bleaching action.

Example 3

Phosphates are frequently used in photographic baths, for example as buffers. The colour developer bath stated in the process sequence thus typically contains an inorganic phosphate. Phosphate ions may also enter the bleach bath by extraction from the film layers or from complexing agents used for water softening, such as for example sodium hexametaphosphate.

When this phosphate is entrained into the bleach bath, there is the risk that precipitates, for example iron phosphate, will form, causing breakdowns in the developing machine and damaging the reversal material. The effect of entrainment

into the bleach bath was tested by adding NaH_2PO_4 . The results shown in Table 3 were obtained.

Table 3

Complexing agent	Iron complex concentration (mol/l)	Added quantity of NaH_2PO_4 (g/l)	Result	
PDTA	0.34	5	precipitates/ gelatinous mass	Comparison
PDTA	0.34	0.5	precipitates/ gelatinous mass	Comparison
PDTA	0.28	5	precipitates/ gelatinous mass	Comparison
PDTA	0.28	0.5	precipitates/ gelatinous mass	Comparison
ADA/PDTA	0.02/0.20	5	clear solution	Invention
ADA	0.15	5	slight haze	Invention
PDTA	0.25	5	slight haze	Invention
PDTA	0.20	5	clear solution	Invention
PDTA	0.20	0.5	clear solution	Invention
PDTA	0.045	5	clear solution	Invention
PDTA	0.045	0.5	clear solution	Invention

Table 3 shows that gelatinous precipitates form in bleach baths with the iron/PDTA complex if the concentration of the iron/PDTA complex is greater than 0.25 mol/l. Surprisingly, at lower concentrations, no precipitates are formed even at elevated phosphate concentrations and, at concentrations of up to 0.2 mol/l, not even any unproblematic slight haze is observable. Since relatively high phosphate concentrations may be established in the tank solution when the bleach bath is recirculated, precipitation becomes increasingly evident at elevated concentrations of the iron/PDTA complex. The Fe/ADA solutions which are effective according to the invention also exhibit less precipitation than the comparison solutions.